MODEL L-85s DIAGRAM PRIMARY CABINET DIMENSIONS

SPECIFICATIONS (CENTIMETERS ARE RESPRESENTED BY [])

MAX TV SIZE: 86"

MAX WEIGHT CAPACITY: 175 LBS [79.4 KG] MAX TRAVEL [EXTENSION]: 52" [132.1]

LIFT SYSTEM HEIGHT: 33.5" [85.1] TO 48" [121.9]

MAX TV HEIGHT : 44" [111.8] MANUAL SWIVEL RANGE : +/- 180 °

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)


TV DIMENSIONS : W_____, H____, D____

MIN. INTERIOR CABINET WIDTH W + 2'' [5.1] = ____ OR 32.5'' [82.6]

MIN. INTERIOR CABINET HEIGHT: SEE CHART ON PAGE 2

MIN. INTERIOR CABINET DEPTH : D + 8.5" [21.6] = _____

MIN. LID CUTOUT WIDTH = TV WIDTH + 2" [5.1] OR 32.5" [82.6] WHICHEVER IS GREATER

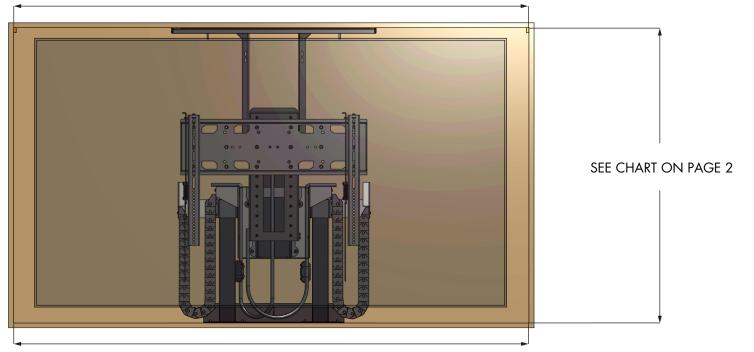


MIN. LID CUTOUT WIDTH = TV WIDTH + 2" [5.1] OR 32.5" [82.6] WHICHEVER IS GREATER

WHICHEVER IS GREATER

NOTES:

- 1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
- 2. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY
- 3. LIFT WILL NOT OPERATE WHEN SWIVELED OUTSIDE OF HOME POSITION
- 4. LIFT ENCLOSURE'S REAR PANEL SHOULD BE CONSTRUCTED TO WITHSTAND A HORIZONTAL LOAD OF 600 LBS [272.2 kg] OR MORE


MIN. LID CUTOUT DEPTH = TV DEPTH + 8.5" [21.6]



MIN. INTERIOR CABINET DEPTH = TV DEPTH + 8.5" [21.6]



MODEL L-85s DIAGRAM PRIMARY CABINET DIMENSIONS - CONTINUED

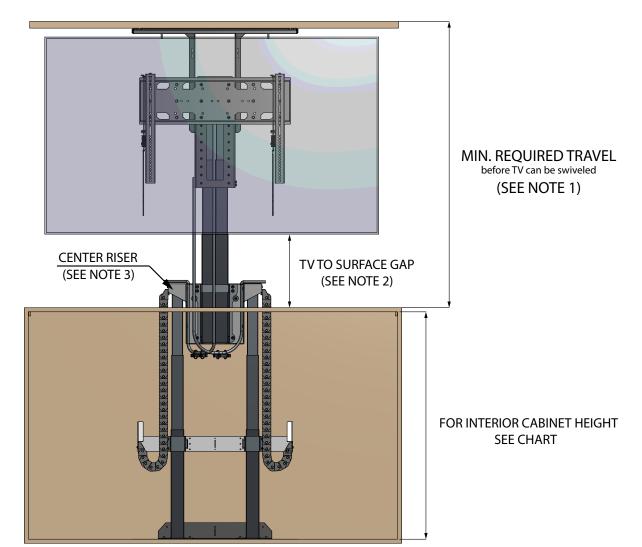

INTERIOR CABINET HEIGHT TABLE		
TV HEIGHT	MIN INTERIOR CABINET HEIGHT	MAX INTERIOR CABINET HEIGHT
32" [81.3]	39.5" [100.3]	45'' [114.3]
33" [83.8]	40′′ [101.6]	46'' [116.8]
34'' [86.4]	40.5" [102.9]	47'' [119.4]
35" [88.9]	41'' [104.1]	48" [121.9]
36" [91.4]	41.5" [105.4]	
37" [94]	42'' [106.7]	
38" [96.5]	42.5'' [108]	
39" [99.1]	43'' [109.2]	
40'' [101.6]	44'' [111.8]	
41'' [104.1]	45'' [114]	
42'' [106.7]	46'' [116.8]	
43'' [109.2]	47'' [119.4]	
44'' [111.8]	48'' [121.9]	


FOR TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED
"TV WITHOUT STAND" HEIGHT

IMPORTANT NOTES:

- 1. MINIMUM REQUIRED TRAVEL = TV HEIGHT + LID THICKNESS + 3" [7.6]
- 2. MAXIMUM TV TO SURFACE GAP = 52" [132.1] MINUS MINIMUM REQUIRED TRAVEL
- 3. CENTER RISER CAN BE HIDDEN BY USING THE PROVIDED HEIGHT LIMIT INSERT TO LIMIT THE TRAVEL [EXTENSION] OF THE LIFT
- 4. MAX TRAVEL FOR THIS SYSTEM IS 52" [132.1]



MODEL L-85s DIAGRAM CABINET REFERENCE DIMENSIONS

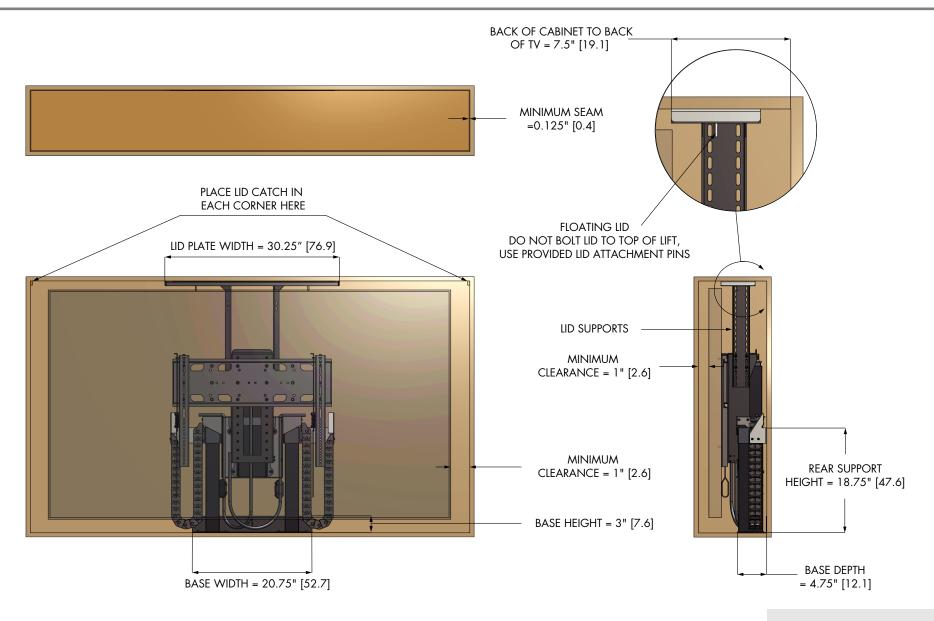

NOTES:

- 1. LID SUPPORTS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
- 2. LID ATTACHMENT PINS ALLOW LID TO FLOAT WITH THE USE OF LID CATCHES
- 3. MINIMUM SEAM CAN BE REDUCED TO 0.0625" [0.2] WITH A 45 DEGREE BEVEL ON THE EDGES OF THE LID

